
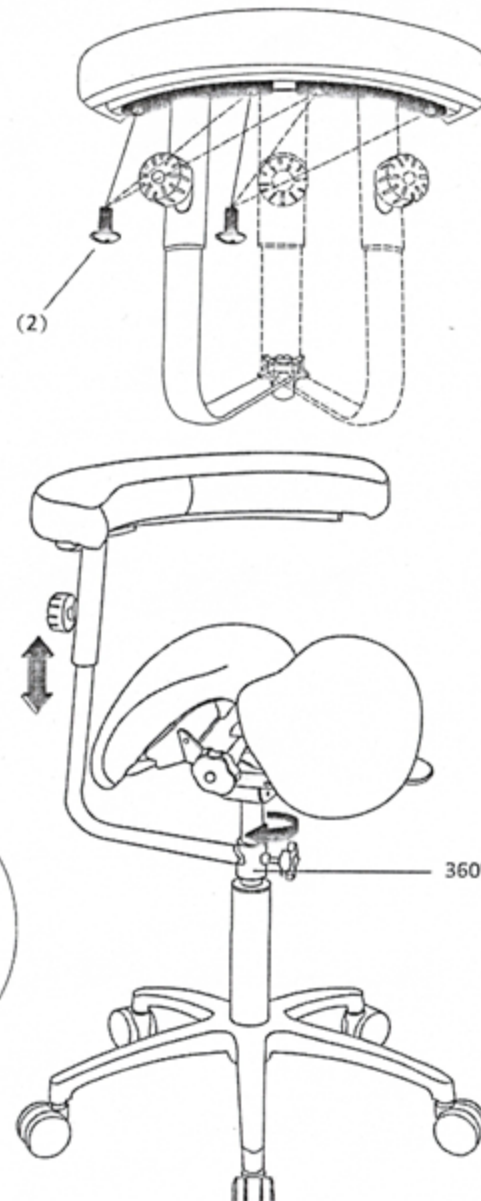


# Asennusohje satulatuolin käsinojalle

Käsinoja soveltuu TOPPE ja SIRO -satulatuoleihin

## Parts Listing For 360° Armrest

- (1) Leather/Vinyl Armrest Cushion
- (2) M6 x 35 mm Chromed Screws x 4
- (3) Oval Tube Arm Flat Frame 15 x 30, 1.6 mm Thickness
- (4) Vertical Arm Tube & M8 Knob
- (5) Lower Curve Tube & Star Knob
- (6) Gasket x 1 (Need to put on the cylinder)

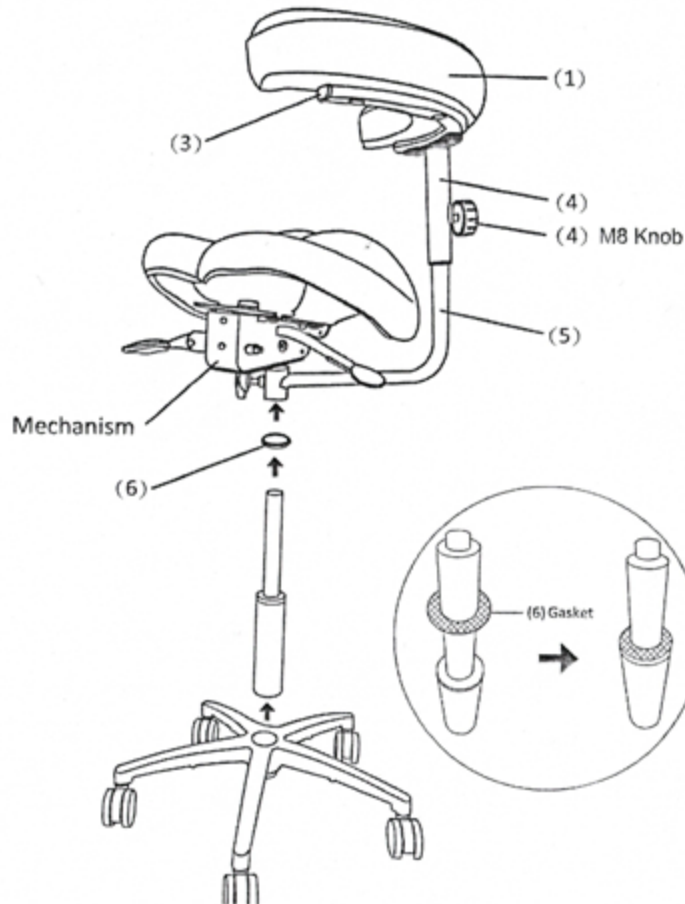

Please Read Instruction Before Assembly

**\*\*Tools needed : Phillips Head Screwdriver for (2)**

Step 1 : Place (4) on (1) & (3) with (2) chromed screws by using Phillips head screwdriver.

Step 2 : The user could choose at will either Left, Central or Right interchangeable arm via putting chromed screws in the ideal location

Step 3 : Detach the saddle seat cushion with mechanism and gas cylinder. Attach above connecting parts to (5), turn M8 knob (4) to fix the arm height, then put the Gasket (6) on the cylinder and have the hole (5) align with cylinder head to get through and turn the star knob (5) to fix.

Step 4 : At last, put the saddle seat cushion (center hole of mechanism) on top of (6) cylinder head.

**\*\* Feature :**

The whole armrest is 360° rotatable;

To adjust its height, the user need to loosen the M8 star knob in the first place, then to adjust

**Caution: Do not use this chair as a step ladder  
Check for loose screws and tighten them every month.**